

BASALT BULB (EU)

SKU: BSALT-I-5W-2200K-E27-SB

5 WATT | 250 LUMENS | 2100K

Inspired by the thousands of extruded basalt columns that make up the Giant's Causeway in Northern Ireland, Basalt unites translucent matte borosilicate glass and dimmable LED.

LAMP

Shape: Custom

Materials: Borosilicate Glass and Brass Cap

Finish: Frosted

Beam angle: 360°


Base: E27

Working temperature: -5°C to 40°C

Warm up time: Instant

Warranty: 3 years

Input Voltage: 220-240V




DIMENSIONS:

55 x 219 mm
(Width x Length)

PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	250lm
Flicker	<5%
Lumens per circuit watt (LM/W)	50lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2100K
Power factor	0.9

POLAR DIAGRAM

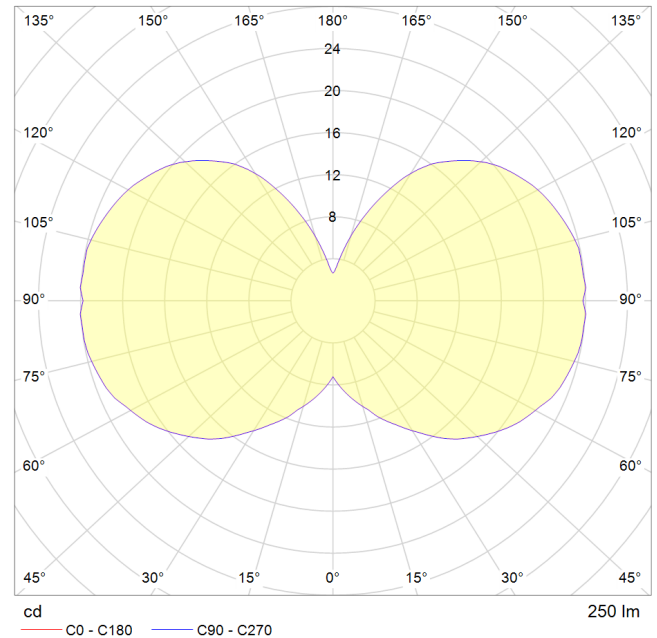

DIMMING

Dimmable: Yes

Dimming type: Trailing edge

Recommended EU Dimmer: Varilight - V-pro

EAN: 5060400156429

IES/LDT FILE: Available upon request.



www.tala.co.uk | hello@tala.co.uk | +44 (0) 20 3026 3246

Specification subject to change without notice. Refer to our website for the most recent product documentation.

SOLID BRASS FINISH

5 WATT | 250 LUMENS | 2100K

SKU CODE: BSALT-I-SET-SGL-PD-01-EU

BASALT SINGLE DROP PENDANT (EU)

Inspired by the thousands of extruded basalt columns that make up the Giant's Causeway in Northern Ireland, Basalt unites translucent mouth-blown borosilicate glass and dimmable LED technology, with a solid brass pendant finish.

LAMP

Shape: Custom

Bulb Materials: Borosilicate glass and Brass base cap

Bulb Finish: Frosted

Fixture Materials: Sand-casted and polished solid Brass

Beam angle: 360°

Base: E27

Working temperature: -5°C to 40°C

Warm up time: Instant

Warranty: 3 years

Input Voltage: 220-240V



DIMENSIONS:

BULB:

55 x 219 mm (Width x Length)

FIXTURE:

52 x 75 mm (Width x Length)

CEILING PLATE:

250 x 25 mm (Width x Length)


CABLE:

400cm (Length)

PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	250lm
Flicker	<5%
Lumens per circuit watt (LM/W)	50lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2100K
Power factor	0.9

POLAR DIAGRAM

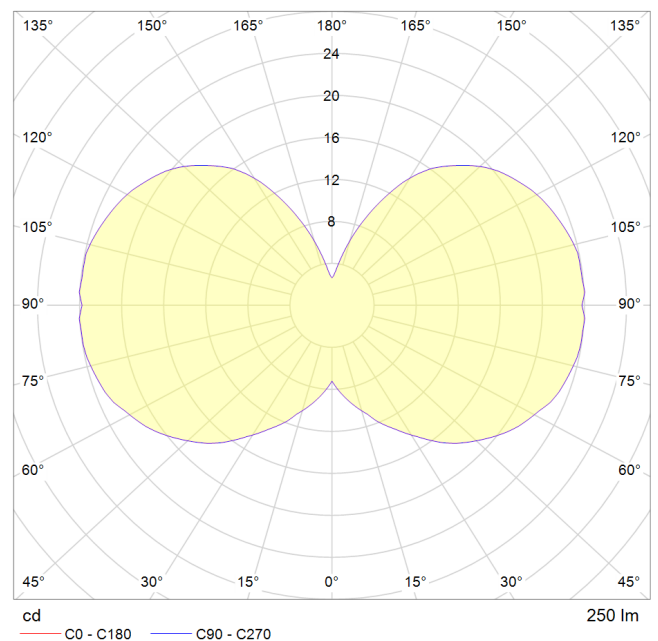

DIMMING

Dimmable: Yes

Dimming type: Trailing edge

Recommended EU Dimmer: Varilight - V-pro

EAN CODE: 5060400156429

IES/LDT FILE: Available upon request.



www.tala.co.uk | hello@tala.co.uk | +44 (0) 20 3026 3246

Specification subject to change without notice. Refer to our website for the most recent product documentation.

STAINLESS STEEL FINISH

5 WATT | 250 LUMENS | 2100K

SKU CODE: BSALT-I-SET-SGL-PD-02-EU

BASALT SINGLE DROP PENDANT (EU)

Inspired by the thousands of extruded basalt columns that make up the Giant's Causeway in Northern Ireland, Basalt unites mouth-blown borosilicate glass and dimmable LED technology, with a stainless steel pendant finish.

LAMP

Shape: Custom

Bulb Materials: Borosilicate glass and Brass base cap

Bulb Finish: Frosted

Fixture Materials:

Lost-wax casted and polished Stainless Steel

Beam angle: 360°


Base: E27

Working temperature: -5°C to 40°C

Warm up time: Instant

Warranty: 3 years

Input Voltage: 220-240V

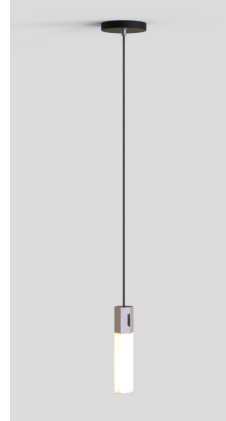

DIMENSIONS:

BULB:
55 x 219 mm (Width x Length)

FIXTURE:
52 x 75 mm (Width x Length)


CEILING PLATE:
250 x 25 mm (Width x Length)

CABLE:
400cm (Length)

PERFORMANCE

CRI (colour rendering index)	95
Lamp lumen output	250lm
Flicker	<5%
Lumens per circuit watt (LM/W)	50lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2100K
Power factor	0.9

POLAR DIAGRAM

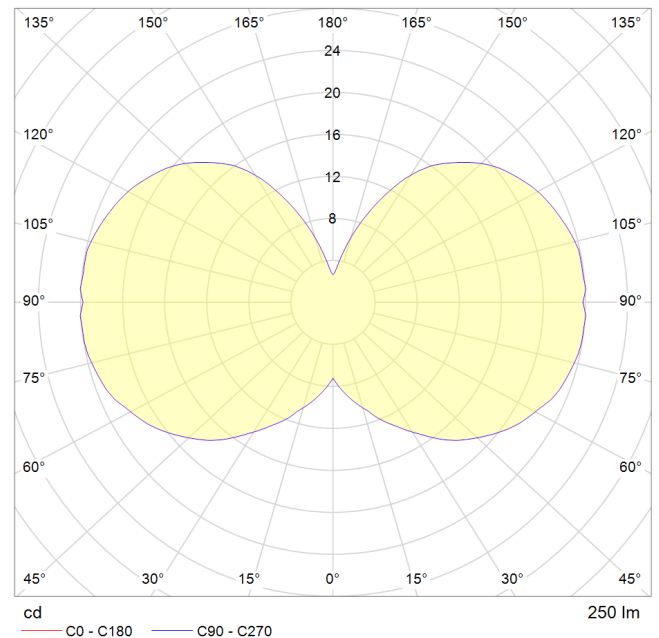

DIMMING

Dimmable: Yes

Dimming type: Trailing edge

Recommended EU Dimmer: Varilight - V-pro

EAN CODE: 5060400156443

IES/LDT FILE: Available upon request.

IP54



www.tala.co.uk | hello@tala.co.uk | +44 (0) 20 3026 3246

Specification subject to change without notice. Refer to our website for the most recent product documentation.

SOLID BRASS FINISH

5 WATT | 250 LUMENS | 2100K (PER BULB)

SKU CODE: BSALT-I-SET-TRI-PD-01-EU

BASALT 3 DROP PENDANT (EU)

Inspired by the thousands of extruded basalt columns that make up the Giant's Causeway in Northern Ireland, Basalt unites translucent mouth-blown borosilicate glass and dimmable LED technology, with a solid brass pendant finish.

LAMP

Shape: Custom

Bulb Materials: Borosilicate Glass and Brass Cap Bulb

Finish: Frosted

Fixture Materials: Sand-casted and polished solid Brass

Beam angle: 360°

Base: E27

Working temperature: -5°C to 40°C

Warm up time: Instant

Warranty: 3 years

Input Voltage: 220-240V



DIMENSIONS:

BULB:

55 x 219 mm (Width x Length)

FIXTURE:

52 x 75 mm (Width x Length)

CEILING PLATE:

250 x 25 mm (Width x Length)


CABLE:

400cm (Length)

PERFORMANCE (PER BULB)

CRI (colour rendering index)	95
Lamp lumen output	250lm
Flicker	<5%
Lumens per circuit watt (LM/W)	50lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2100K
Power factor	0.9

POLAR DIAGRAM

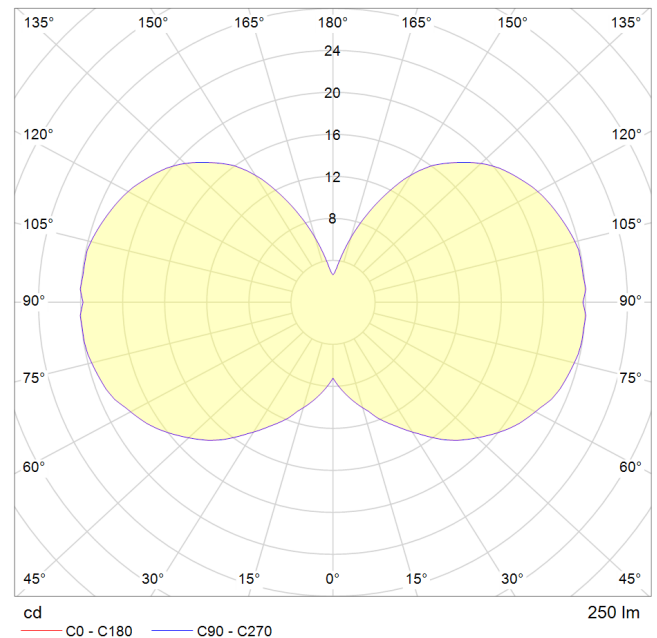

DIMMING

Dimmable: Yes

Dimming type: Trailing edge

Recommended EU Dimmer: Varilight - V-pro

EAN CODE: 5060400156467

IES/LDT FILE: Available upon request.

IP54



www.tala.co.uk | hello@tala.co.uk | +44 (0) 20 3026 3246

Specification subject to change without notice. Refer to our website for the most recent product documentation.

STAINLESS STEEL FINISH

5 WATT | 250 LUMENS | 2100K (PER BULB)

SKU CODE: BSALT-I-SET-TRI-PD-02-EU

BASALT 3 DROP PENDANT (EU)

Inspired by the thousands of extruded basalt columns that make up the Giant's Causeway in Northern Ireland, Basalt unites mouth-blown borosilicate glass and dimmable LED technology, with a stainless steel pendant finish.

LAMP

Shape: Custom

Bulb Materials: Borosilicate Glass and Brass Cap

Bulb Finish: Frosted

Fixture Materials:

Lost-wax casted and polished Stainless Steel

Beam angle: 360°

Base: E27

Working temperature: -5°C to 40°C

Warm up time: Instant

Warranty: 3 years

Input Voltage: 220-240V



DIMENSIONS:

BULB:

55 x 219 mm (Width x Length)

FIXTURE:

52 x 75 mm (Width x Length)

CEILING PLATE:

250 x 25 mm (Width x Length)


CABLE:

400cm (Length)

PERFORMANCE (PER BULB)

CRI (colour rendering index)	95
Lamp lumen output	250lm
Flicker	<5%
Lumens per circuit watt (LM/W)	50lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2100K
Power factor	0.9

POLAR DIAGRAM

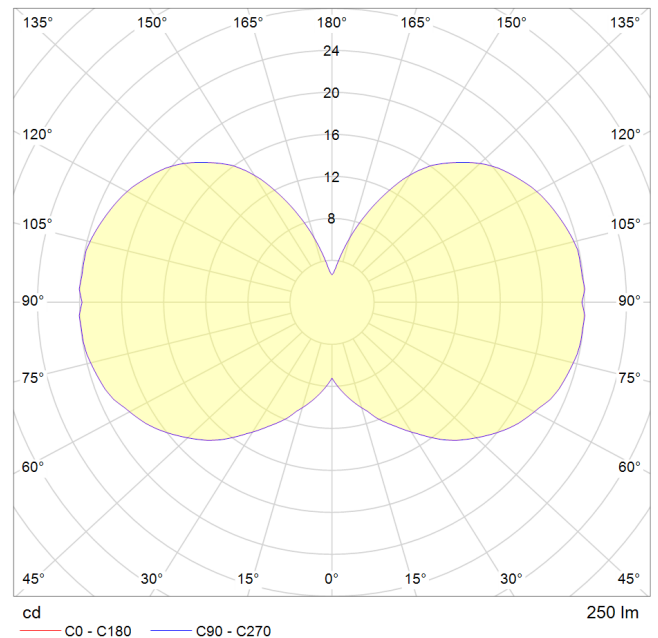

DIMMING

Dimmable: Yes

Dimming type: Trailing edge

Recommended EU Dimmer: Varilight - V-pro

EAN CODE: 5060400156481

IES/LDT FILE: Available upon request.

IP54



www.tala.co.uk | hello@tala.co.uk | +44 (0) 20 3026 3246

Specification subject to change without notice. Refer to our website for the most recent product documentation.

SOLID BRASS FINISH

5 WATT | 250 LUMENS | 2100K (PER BULB)

SKU CODE: BSALT-I-SET-NON-PD-01-EU

BASALT 9 DROP PENDANT (EU)

Inspired by the thousands of extruded basalt columns that make up the Giant's Causeway in Northern Ireland, Basalt unites translucent mouth-blown borosilicate glass and dimmable LED technology, with a solid brass pendant finish.

LAMP

Shape: Custom

Bulb Materials: Borosilicate Glass and Brass Cap

Bulb Finish: Frosted

Fixture Materials: Sand-casted and polished solid Brass

Beam angle: 360°

Base: E27

Working temperature: -5°C to 40°C

Warm up time: Instant

Warranty: 3 years

Input Voltage: 220-240V



DIMENSIONS:

BULB:

55 x 219 mm (Width x Length)

FIXTURE:

52 x 75 mm (Width x Length)

CEILING PLATE:

508 x 50 mm (Width x Length)


CABLE:

500cm (Length)

PERFORMANCE (PER BULB)

CRI (colour rendering index)	95
Lamp lumen output	250lm
Flicker	<5%
Lumens per circuit watt (LM/W)	50lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2100K
Power factor	0.9

POLAR DIAGRAM

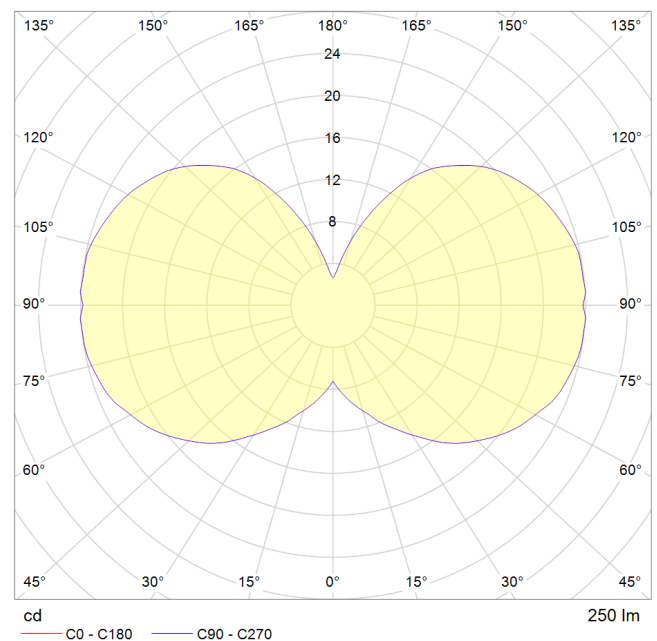

DIMMING

Dimmable: Yes

Dimming type: Trailing edge

Recommended EU Dimmer: Varilight - V-pro

EAN CODE: 5060400157723

IES/LDT FILE: Available upon request.

IP54



www.tala.co.uk | hello@tala.co.uk | +44 (0) 20 3026 3246

Specification subject to change without notice. Refer to our website for the most recent product documentation.

STAINLESS STEEL FINISH

5 WATT | 250 LUMENS | 2100K (PER BULB)

SKU CODE: BSALT-I-SET-NON-PD-02-EU

BASALT 9 DROP PENDANT (EU)

Inspired by the thousands of extruded basalt columns that make up the Giant's Causeway in Northern Ireland, Basalt unites mouth-blown borosilicate glass and dimmable LED technology, with a stainless steel pendant finish.

LAMP

Shape: Custom

Bulb Materials: Borosilicate Glass and Brass Cap

Bulb Finish: Frosted

Fixture Materials:

Lost-wax casted and polished Stainless Steel

Beam angle: 360°


Base: E27

Working temperature: -5°C to 40°C

Warm up time: Instant

Warranty: 3 years

Input Voltage: 220-240V

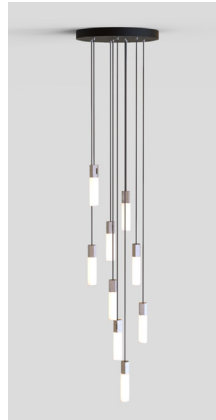

DIMENSIONS:

BULB:

55 x 219 mm (Width x Length)

FIXTURE:

52 x 75 mm (Width x Length)

CEILING PLATE:

508 x 50 mm (Width x Length)


CABLE:

500cm (Length)

PERFORMANCE (PER BULB)

CRI (colour rendering index)	95
Lamp lumen output	250lm
Flicker	<5%
Lumens per circuit watt (LM/W)	50lm/W
Lifetime (TM-21) (hours)	15,000hrs
Colour Temperature	2100K
Power factor	0.9

POLAR DIAGRAM

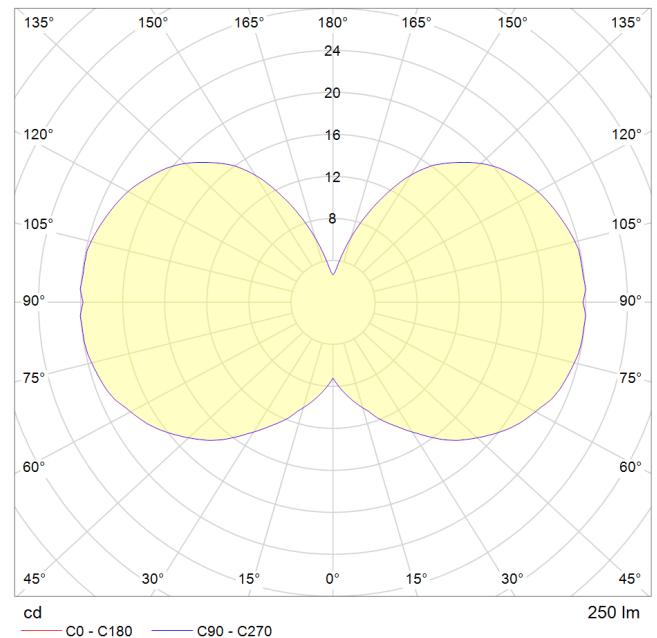

DIMMING

Dimmable: Yes

Dimming type: Trailing edge

Recommended EU Dimmer: Varilight - V-pro

EAN CODE: 5060400157747

IES/LDT FILE: Available upon request.

IP54



www.tala.co.uk | hello@tala.co.uk | +44 (0) 20 3026 3246

Specification subject to change without notice. Refer to our website for the most recent product documentation.